HALLMARK FLOORS®
HARDWOOD FLOORING

TRUE COLLECTION
ENGINEERED HARDWOOD

Dahlia Oak

Onyx Oak TR75ONYO

Orris Maple TR75ORRM

Amber Pine TR75AMBP

Orange Blossom TR75ORAH

Dahlia Oak TR75DAHO

Azalea Hickory TR75AZAH

Bergamot Oak TR75BERO

Lotus Oak TR75LOTO

Bergamot Oak

HALLMARK FLOORS®
HARDWOOD FLOORING

TRUE COLLECTION
ENGINEERED HARDWOOD

Features

Length:	Up to 6’2” RL
Width:	7 ½”
Thickness:	5/8” nominal Engineered 3mm Sawn Cut Face
Finish:	Nu Oil® Super-Matte
Edge Detail:	Handcrafted Bevel
Certified:	EPA - TSCA Title VI Compliant 3rd Party Certified - Responsibly Harvested
TrueCore:	Third Party Certified
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 3 year commercial finish 10 year commercial structural
Maintenance:	APPROVED CLEANERS: WOCA Natural Soap Spray and Natural Soap Concentrate, Bona® Pro Series Natural Oil Floor Cleaner OR LOBA® Universal Floor Cleaner

Azalea Oak

Benefits

Finish:	Protective low sheen - provides a truly natural wood finish Guaranteed quality and durability - long lasting finish
Wear Layer:	Ultra thick wear layer provides lasting durability Color goes all the way through the wear layer Easier to repair or touch-up if an accident occurs
Structure:	Greater dimensional stability Healthy indoor air quality

Trim Options

Stair Nose
T-molding
Threshold
Reducer

Installation

Nail Down
Glue Down
Float
Over Radiant Heat (Excluding Hickory)

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade. See complete installation instructions. Hallmark Hickory and Solid products are not approved for installation over Radiant Heat.

Refer to www.hallmarkfloors.com for latest, updated information.

nu oil® Truecore® Centerply

Light Characteristics

Wood Floor Plank with Bog Wood Process
Light Exposure over time

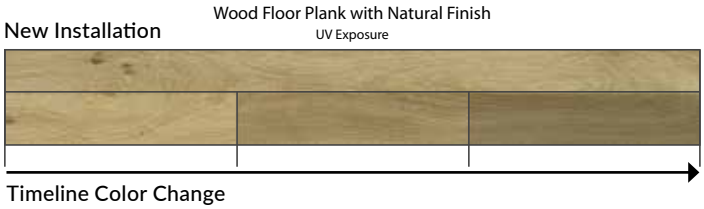

What to Expect with Mineral Enhanced Floors

1. Regional Variation
2. Batch Variation
3. Plank Variation
4. Age Related Patina
5. Color Change V3-V4+

All True colors are mineral enhanced.
Our through color process utilizes salts & minerals in conjunction with present tannins in the wood enhancing the wood planks natural patina. Our process creates one of a kind floor representative of partially fossilized timbers in a wide range of colors… light to heavy color contrast between boards, open & filled knots, splits & checks ranging from large to small. Heartwood and sapwood (light to dark) can be present along with varied textures from light to heavy saw marks, wire brushing and hand sculpting. Refer to sample for a visual representation.

What is True or the Bog Wood process?
This is a natural accelerated aging process used to enhance the individual species color range within every plank. The deepening in color and variation is created by adding the bog wood process or more specific adding salts minerals and tannins to each species along with introducing heat pressure and time creating a natural highly sought after one of kind look. While a very controlled environment and process, it is not 100% precise, every region, grove and tree reacts uniquely.